


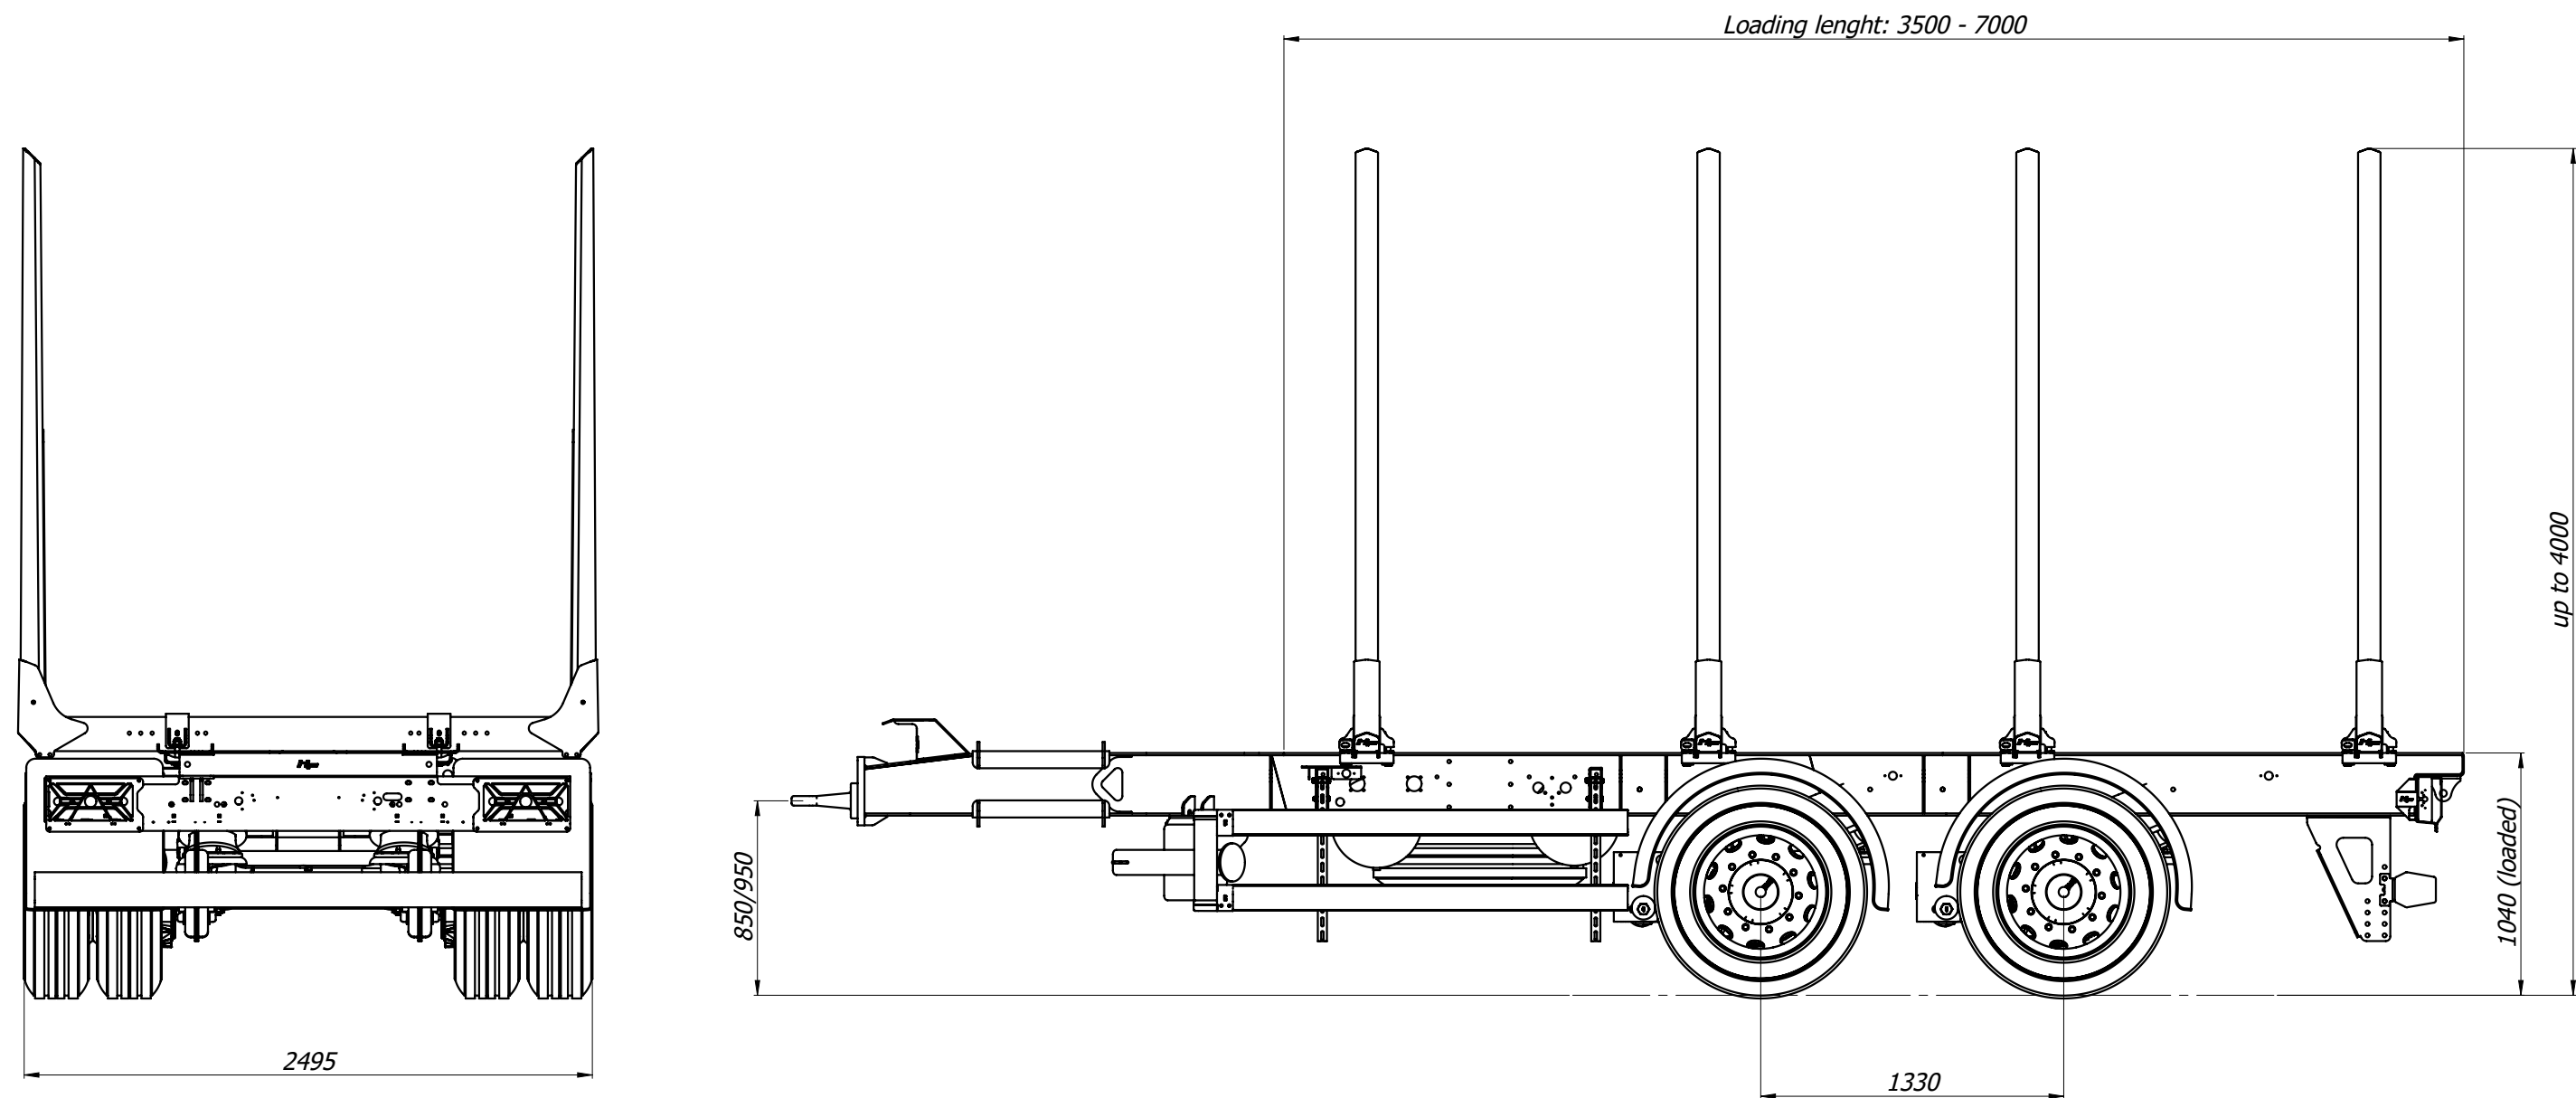

HYDROFAST HFPT2 tandem trailer

Axles: SAF BI9/ZI9 Disc brake

Suspension: Pneumatic

Pneumatic system: Knorr-bremse

Wheels: 385/55 R22,5 or 385/65 R22,5 or 275/70 R22,5 (twin wheels) or 255/70 R22,5 (twin wheels)

Drawbar eye: Rockinger/VBG/Ringfeder, eye diameter fi50, fi57,5

Lighting system: Aspock

Pneumatic coupling: Duomatic

Swivel landing gear

Technically permissible maximum laden mass: 19000 kg

Technically permissible maximum mass on each axle: 9000 kg

Mass of trailer: from 3000 kg (twin wheels, without bunks)

Niniejsza dokumentacja jest własnością firmy
Hydrofast Sp. z o.o.. Wykorzystywanie, kopiowanie
i rozpowszechnianie bez zgody autora zabronione.

		Nazwisko	Data	Podpis	Tolerancje wym. wg:	Wym.	Odchyłka	Data wydruku:	
	Konstruował:	P. Biegus	19.04.2022		ISO 2768-1-c 	0,5-3	± 0,15	14.10.2022	
	Kreślił:	P. Biegus	14.10.2022			3-6	± 0,20	Skala:	
	Zatwierdził:	A. Żmujdzin	14.10.2022			6-30	± 0,50	1:30	
Hydrofast Sp. z o.o. ul. Przędzalniana 8 15 - 688 Białystok	Temat:						30-120	± 0,80	Format:
							120-400	± 1,20	A3
							400-1000	± 2,00	
							1000-2000	± 3,00	
						2000-4000		± 4,00	
		Nazwa:				Masa: 3423077.99 g			
		740.00.000 - Przyczepa HFPT2 5300				Materiał: wg zestawienia			
						Nr rys.:			

740.00.000 - Przyczepa HFPT2 5300